



## External Enclosure

RX343-S BLK/SLV

User's Manual

Hardware Assembly Guide

Please register your product at [www.rosewill.com](http://www.rosewill.com) for complete warranty information and future support.

If you have any question while using our products, please feel free to contact us at [feedback@rosewill.com](mailto:feedback@rosewill.com).


We will do our best to help you.

Thank you for purchasing our product and we hope you will enjoy it.

Please follow the instructions and make sure your hard drive is successfully installed to the external enclosure!

### STEP1 :


Take out the enclosure from Aluminum cover.

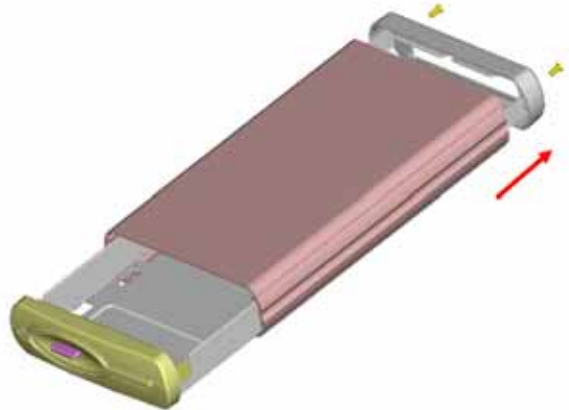

1

### STEP2 :


You will see the internal structure of the Enclosure.

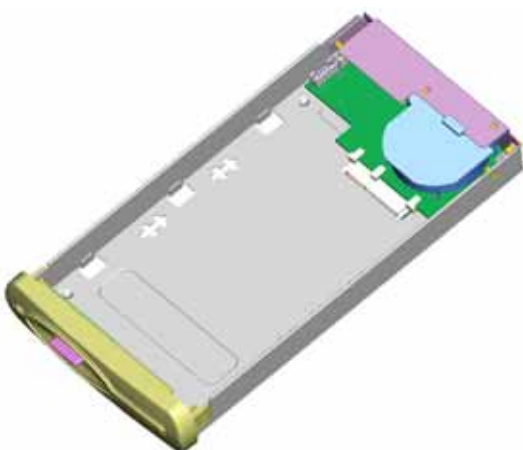

2

### STEP3 :

Fit the 3.5" HDD SATA connector into PCB's SATA connector.

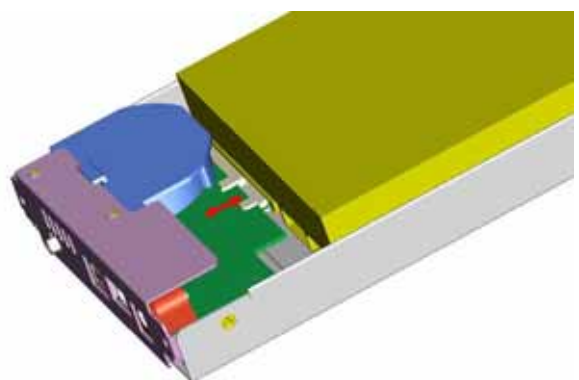


Push the HDD toward the PCB and make sure the connector is well connected.

3

**STEP4 :**


**Screw the HDD on the enclosure tightly.**

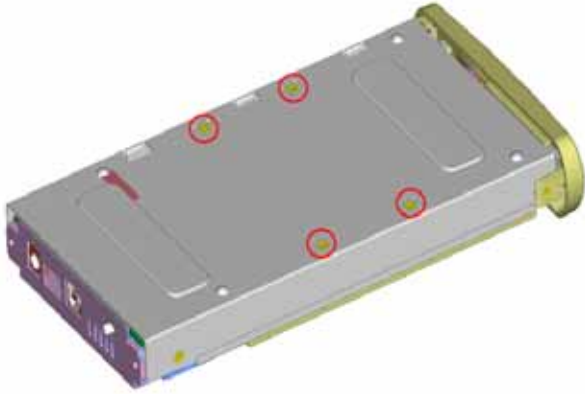

**4**

**STEP5:**


**Push the HDD prop into the Aluminum Cover.**

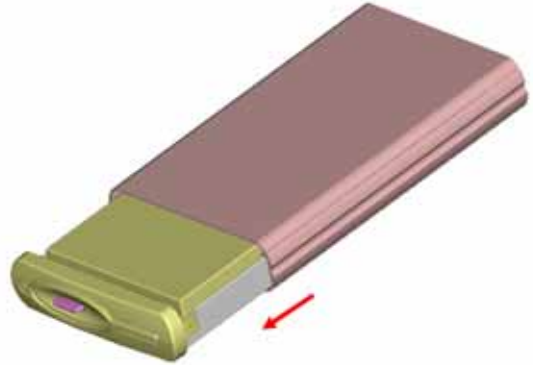

**5**

**STEP6 :**


**Screwed the two pieces together.**

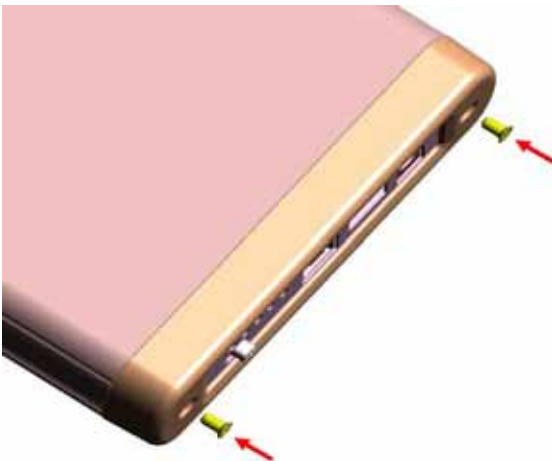

**6**

**STEP7 :**

**Press the LED switch for power on/off.**

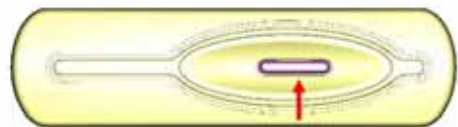

**7**