

RX306-PU3-35B

Dual HDD Docking

User Manual




Rosewill

Product Details Figure 2



3.

Product Details Figure 3

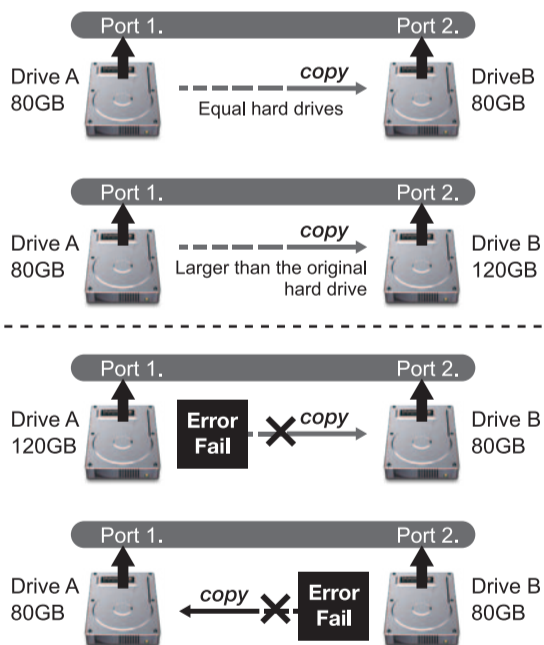

6.

- Right-click the new disk drive and select [New Logical drive].
 - Continue with the instructions.
- After the information on your new disk is shown and you can see it in the computer file tree, your new HDD is ready to use !

Disclaimer

All the information in this document is subject to change without prior notice. The manufacturer makes no representations or any warranties regarding the contents of this manual. The information contained in this manual is provided for the general use by the customers. No part of this document may be reproduced or transmitted in any form by any means without the expressly written permission of the manufacturer. All brand Names used in this document are trademarks or registered trademarks of their respective holders.

9.

Please Read and Save This User Guide

Please thoroughly read this manual before setting up your unit. Failure to comply with the requirements and instructions could cause personal injury and/or property damage.

I. System Requirements

- Hardware Requirement : PC, Notebook, Mac; USB 3.0 port
- Operation System : Windows XP/Vista/7/8; Mac OS 10+
- Power Source : AC wall jack

II. Key Features

- Dual HDD bays
- For 2.5" and 3.5" SATA III HDD
- Stand-alone duplication (no computer required for copying HDDs)
- Transfer rate up to 5 Gb/sec
- Backward compatible SATA I, II, III; USB 2.0, 3.0

III. Package Contents

- Docking Station x 1
- 12V Power Supply x 1
- USB 3.0 Cable x 1
- User Manual x 1

1.



4.

Product Details Figure 4



7.

Specifications

2.5" and 3.5" Dual HDD Duplicating Docking

Part Number	17-182-346
Model	RX306-PU3-35B
Dimensions	5.5 x 3.15 x 2.6 inch 140 x 80 x 66 mm
Storage / Size	2.5" and 3.5" SATA HDD Bay
Speed	80 GB HDD = 25 minutes
Voltage	12V/4A
Power	DC
Weight	0.7 lb
Color	Black
Material / Finish	Plastic (ABS)
Cord Connector Interface	Wall outlet (Power); USB (Computer)

10.

IV. Installing & Using


Refer to Figure 1 for the details of the HDD dock.

- Connect the 12V power supply from the DC jack to a DC wall outlet.
- Connect the USB cable from the USB port to a computer or laptop.
- Insert the HDD(s)

- If you are going to use both HDD ports, you must slide open the case to expose the second slot for your drive (Figure 2).
- If you are going to duplicate an HDD, refer to section IV "HDD Duplication Instructions."

- Remove the HDD(s).

Product Details Figure 1

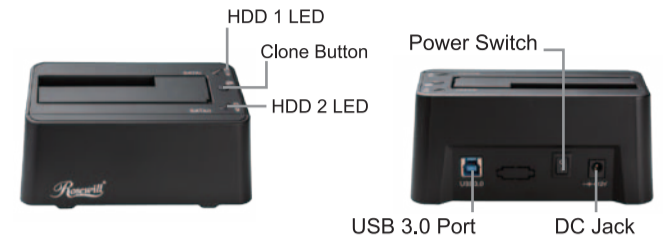

2.

V. Installing Drivers

Windows XP/Vista/7/8 will automatically detect the setup [USB Mass Storage Device]. The setup icon will appear on your system toolbar.

VI. Duplicating HDDs

This docking station can directly copy one HDD to another. No computer is needed.

Things to remember :

- Destination disk must be equal or larger than the original disk, except Port 2 (See Figure 3).
- All data will be formatted once duplication starts.
- Duplication speed depends on the size of the HDD, not the amount of data.
- Estimated speed for 80 GB HDD=25 minutes.

Instructions :

Refer to Figure 4 during the following steps.

- Press the [Clone] button for at least five (5) seconds until both HDD 1 and HDD 2 LEDs flash, then release.
- Press the [Clone] button once. This sets and starts the duplication process.

5.

VIII. Disconnecting from Power

Warning : Before removing the USB cable, you must correctly disconnect the USB device from your computer.

- Right-click on the [USB/Storage] device icon on the lower right corner of your taskbar. A [Safely Remove Hardware] message will appear.
- Click on [STOP] or [EJECT]. It is now safe to remove the USB cable. It is now safe to remove the AC/DC wall cable.

IX. Formatting a New HDD

If you are using a new HDD for the first time, you will need to format (partition) it before use.

- Find My Computer and right click.
- Select [Manager]. A window will display Computer Manager.
- Click [Computer Manager].
- Click [Disk Manager]. A window will display under the system disk [unallocated].
- Right-click in the new disk twice and select [New Partition]. The disk information will appear [Free Space...].

8.

EN

Rosewill

Rosewill Technical Support information
1-800-575-9885 Monday - Friday 8AM - 5PM PST
techsupport@rosewill.com

Thank you for purchasing a quality Rosewill Product.
Please register your product at : www.rosewill.com
for complete warranty information and future support for your product.

www.rosewill.com